



**MULTICOM** s.r.l.

**MULTICOM SRL**

Via E. Fermi, 170  
46011 – Acquafredda sul Chiese (MN)

ITALY


Phone/Fax: 0376727248

[info@multicom.srl.it](mailto:info@multicom.srl.it) | [www.multicom.srl.it](http://www.multicom.srl.it)

SCHEDA TECNICA - TECHNICAL DATA SHEET

**Multiaxial Fabrics-Biaxial ( $\pm 45^\circ$ ) BX600/225AK090**

**Identification**

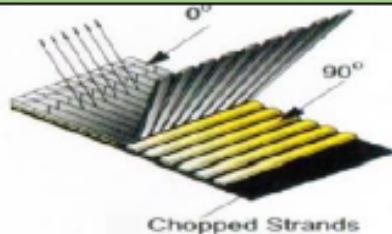

Example: LTM600/225  
LTM: Biaxial ( $0^\circ/90^\circ$ ) with mat  
600: Nominal weight per square meter ( $\text{g/m}^2$ )/  $0^\circ/90^\circ$   
225: Nominal weight per square meter ( $\text{g/m}^2$ ) of mat

**Specification**

Construction	Area Weight, $\text{g/m}^2$	Tolerance, %	Remark
$0^\circ$	336	$\pm 5.0$	E-Glass 1200 tex
$+45^\circ$			
$90^\circ$	293	$\pm 5.0$	E-Glass 1200 tex
$-45^\circ$			
Mat	225		E-Glass 2400 tex
Stitching	15	$\pm 5.0$	Polyester 167d' tex
Total Area Weight	869	$\pm 5.0$	
Stitch Gauge : 7Gauge/25mm			Stitch style : Pillar/Tricot Stitch
Stitch length : 4,1mm			Loss on Ignition : 0.5%~4.0%
Moisture Content : $\leq 0.2\%$			Width : $\pm 10\text{mm}$
Colour tracer			--

**Packing**

Product is manufactured in form of a roll wound on a paper tube and then packed in a plastic film and placed within a cardboard carton on pallet.

Above package is standard one, any other package style is negotiable by both of us

**Storage**

It is recommended that the fiber glass are stored in a cool and dry environment. Recommended temperature range of storage is between  $10 \sim 30^\circ\text{C}$  and relative humidity between  $50 \sim 75\%$ . The fiber glass should remain in the packaging until just prior to use.

Remark : Other specification is available upon request.