



**MULTICOM** s.r.l.

**MULTICOM SRL**

Via E. Fermi, 170  
46011 – Acquafredda sul Chiese (MN)  
ITALY


Phone/Fax: 0376727248

[info@multicom.srl.it](mailto:info@multicom.srl.it) | [www.multicom.srl.it](http://www.multicom.srl.it)

**SCHEDA TECNICA – TECHNICAL DATA SHEET**

**Multiaxial Fabrics-Quadraxial (0°/+45°/90°/-45°) QX1200**

**Identification**

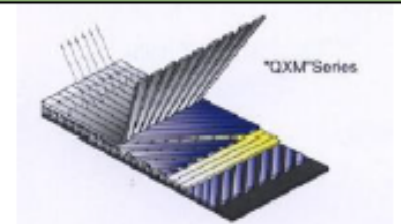

Example: QX1200  
QX: Quadraxial Fabric (0°/+45°/90°/-45°)  
1200: Nominal weight per square meter (g/m<sup>2</sup>)

**Specification**

Construction	Area Weight, g/m <sup>2</sup>	Tolerance, %	Remark
0°	300	±5.0	
+45°	300	±5.0	
90°	300	±5.0	
-45°	300	±5.0	
Mat			
Stitching	11	±5.0	Polyester 167d' tex
Total Area Weight	1211	±5.0	
Stitch Gauge : 7Gauge/25mm		Stitch style : Pillar/Tricot Stitch	
Stitch length : 3,1mm		Loss on Ignition : 0.5%~4.0%	
Moisture Content : ≤0.2%		Width : ±10mm	
Colour tracer		--	

**Packing**

Product is manufactured in form of a roll wound on a paper tube and then packed in a plastic film and placed within a cardboard carton on pallet.

Above package is standard one, any other package style is negotiable by both of us

**Storage**

It is recommended that the fiber glass are stored in a cool and dry environment. Recommended temperature range of storage is between 10 ~ 30°C and relative humidity between 50 ~ 75%. The fiber glass should remain in the packaging until just prior to use.

Remark : Other specification is available upon request.